





ADI 350 1-3W

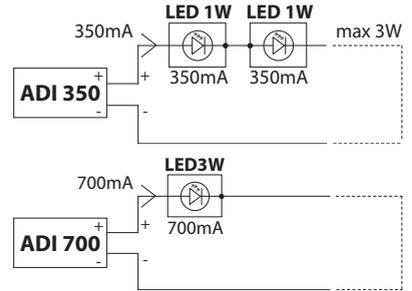

ADI 700 1x3W



- ▶ casing: plastic
- ▶ Gehäuse: Kunststoff

<b>Kanlux</b>			<b>PRI</b>	<b>SEC</b>	
ADI 350 1-3W	01440	white / weiß	220-240V~; 50/60Hz; 0,04A	DC 350mA (0,5V-10V) 1...3 x 1W	max 50
ADI 700 1x3W	01441	white / weiß	220-240V~; 50/60Hz; 0,04A	DC 700mA (0,5V-4V) 1 x 3W	max 40

ADI 350 1-3W current stabilizing 350mA DC / ADI 700 1x3W current stabilizing 700mA DC / maximum allowable housing temperature is 75°C / thermal protection switching feeder off after temperature 110°C is exceeded / built-in short circuit protection and overload protection  
 ADI 350 1-3W Stromstabilisierung 350mA DC / ADI 700 1x3W Stromstabilisierung 700mA DC / die maximal zulässige Gehäusetemperatur beträgt 75°C / der Übertemperaturschutz schaltet die Versorgungseinheit bei Überschreitung von 110°C aus / eingebaut Kurzschlußschutz und Überlastschutz