




KS6 B6/3



KS6 B10/3

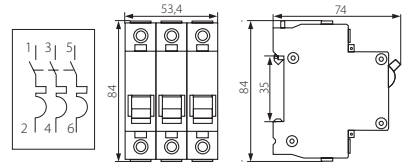

KS6 B16/3



KS6 B20/3



KS6 B25/3



KS6 B32/3



KS6 B40/3




KS6 B63/3

► casing: plastic

► Gehäuse: Kunststoff

Release characteristic  
Auslösecharakteristik

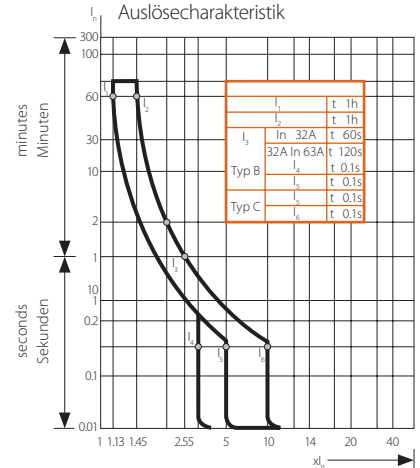

**Kanlux**



In

KS6 B6/3	04450	green / grün	6A
KS6 B10/3	04451	red / rot	10A
KS6 B16/3	04452	grey / grau	16A
KS6 B20/3	04453	blue / blau	20A
KS6 B25/3	04454	yellow / gelb	25A
KS6 B32/3	04455	purple / purpurrot	32A
KS6 B40/3	04456	black / schwarz	40A
KS6 B63/3	04458	black / schwarz	63A



for protection of conductors and receivers against overloads and short-circuits in systems and equipment / compliance with EN60898-1/IEC60898-1 standards  
zum Schutz der Leiter und Verbraucher vor Überlast und Kurzschluß in Installationen und Geräten / Konformität mit den Normen EN60898-1/IEC60898-1