


AL

Alarm Contact
ALARMKONTAKT

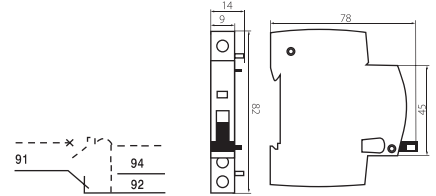

AL

SYMBOL SYMBOL	INDEX INDEX	RATED VOLTAGE (V) BEMESSUNGSSPANNUNG (V)	RATED CURRENT IN (A) BEMESSUNGSSTROM (A)
KMA-AL	23315	230V AC	6A

GB

AL Alarm contact
Rated insulation voltage U_i : 500V
Working voltage range: 70~100% U_s
Dielectric strength: 2kV, 1min
Mechanical strength: 4000
Installation on the left side of the KMB circuit breaker, indicates that it is activated when the KMB device is activated

DE

Bemessungsisolationsspannung U_i : 500V
Bereich der Betriebsspannung: 70~100% U_s
Durchschlagfestigkeit: 2kV/1min
Mechanische Belastbarkeit: 4000
Montage auf der linken Seite des KMB-Schalters, Reaktionsanweisung im Falle der Auslösung des KMB-Apparats