




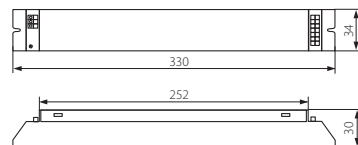

BL-EVG

BL-118H-EVG
BL-218H-EVG
BL-136H-EVGBL-236H-EVG
BL-258H-EVG
BL-158H-EVGBL-418H-EVG
BL-3-4x14H-EVG

► casing: steel sheet

► Gehäuse: Stahlblech

Kanlux			In	[W] 	[g]
BL-118H-EVG	70480	silver / silber	0,08A	1 x 18	210
BL-218H-EVG	70483	silver / silber	0,16A	2 x 18	230
BL-136H-EVG	70481	silver / silber	0,16A	1 x 36	210
BL-236H-EVG	70484	silver / silber	0,32A	2 x 36	285
BL-158H-EVG	70482	silver / silber	0,26A	1 x 58	280
BL-258H-EVG	70485	silver / silber	0,51A	2 x 58	310
BL-418H-EVG	70486	silver / silber	0,98A	4 x 18	290
BL-3-4x14H-EVG	08240	silver / silber	0,19A / 0,24A	3 x 14 / 4 x 14	280



BL-3-4x14H-EVG model is used for current stabilizing in T5 fluorescent tubes, other models are used for current stabilizing in T8 fluorescent tubes
das Modell BL-3-4x14H-EVG dient zur Stromstabilisierung bei den Leuchtstoffröhren T5, die sonstigen Modelle dienen zur Stromstabilisierung bei den Leuchtstoffröhren T8